


ECN	REV	CHANGE	DATE	BY
	A	ORIGINATED	7/26/07	DC
	A1	DESIGN UPDATE	9/10/07	DC

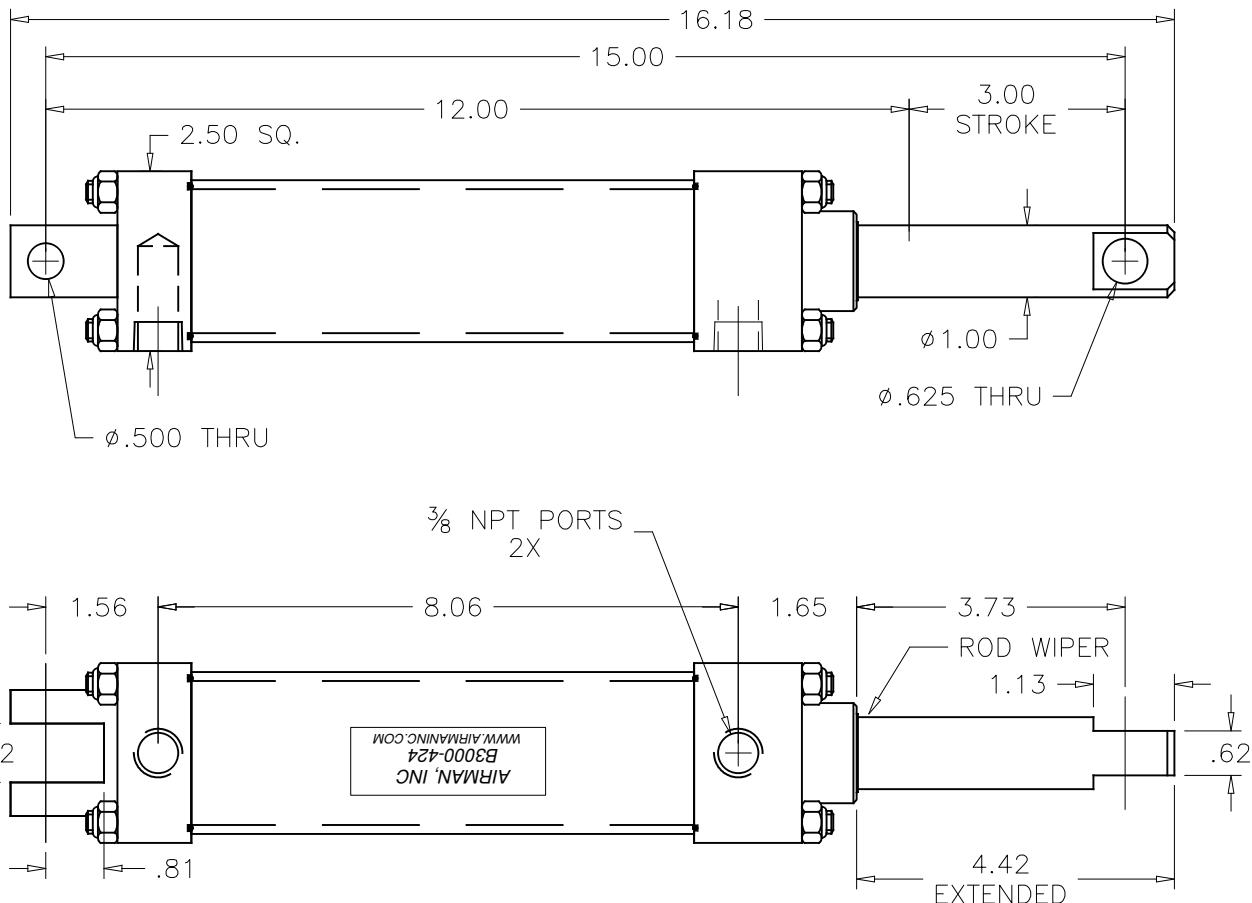

DO NOT SCALE PRINT

CONFIDENTIAL
THIS DRAWING OR ANY PART THEREOF
IS PROPRIETARY AND MAY NOT BE
REPRODUCED OR COPIED WITHOUT
WRITTEN CONSENT OF
AIRMAN INC.

DRAWN
DATE 7/26/07
NAME DC

AIRman, Inc.
Creative Pneumatics
www.airmaninc.com
COPYRIGHT © 1997 AIRMAN INC.

FUNCTION:

2" BORE x 3" STROKE CYLINDER
SPRING EXTEND (65 TO 70 lbs.)
DOUBLE ACTING

MECHANICAL:
MATERIALS:

SEALS: LOW TEMP NITRILE SEALS

FASTENERS: SS

MTG. STYLE: CLEVIS
ASSY.

LUBRICATION: HEAVY TRANSPORT SILICONE

FLOW:

TEMP.: -40 TO 180°F

FILTRATION: 40 MICRON
SYSTEM

LUBRICATION
REQ'D.: N/A

PRESSURE

RANGE: MIN. 35 psi

MAX. 150 psi PNEUMATIC

MAX. 200 psi HYDRAULIC NON-SHOCK

ELECTRICAL:

VOLTAGE:

CURRENT:

DESC 1: 2" BORE x 3" STROKE CYL.
SPRING EXTEND
DOUBLE ACTING

PART IDENTIFIER

B3000-424
DATA SHEET

PG. 1 OF 1